

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number
WO 2004/042893 A1

(51) International Patent Classification⁷: **H02K 3/52**,
15/095, 1/14

(74) Agents: **HOWREY SIMON ARNOLD & WHITE LLP**
et al.; 750 Bering Drive, Houston, TX 77057 (US).

(21) International Application Number:
PCT/US2003/032557

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 16 October 2003 (16.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/422,676 31 October 2002 (31.10.2002) US
10/427,450 30 April 2003 (30.04.2003) US

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant: **EMERSON ELECTRIC CO.** [US/US]; 8000 W. Florissant Ave., St. Louis, MO 63136 (US).


Published:

— with international search report

(72) Inventors: **SHEERAN, Kent, A.**; 3419 Hudson Road, Festus, MO 63028 (US). **RASSOOLKHANI, Payman**; 11341 Frontage Avenue, St. Louis, MO 63043 (US). **MICHAELS, Paul, G.**; 6973 Tholozan Avenue, St. Louis, MO 63109 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **SEGMENTED STATOR WITH IMPROVED HANDLING AND WINDING CHARACTERISTICS AND CORRESPONDING METHOD**

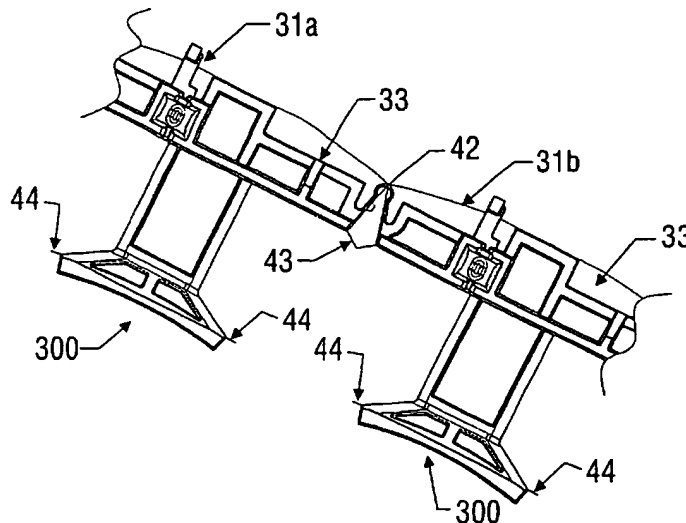

(57) Abstract: A stator assembly that may be rounded into an annular form is disclosed that includes a plurality of stator segments where each stator segment defines a yoke portion and a stator tooth and a containment structure configured to position the stator segments relative to one another such that the stator segments do not physically touch one another. Also disclosed is a method for forming a segmented stator, involving the steps of positioning a plurality of stator segment in a containment structure such that no magnetic circuit between adjacent stator segments is formed, forming a winding coil about at least some of the stator segments; and deforming the containment structure to form an annular stator and to establish a magnetic circuit between adjacent stator segments.

WO 2004/042893 A1

- 1 -

SEGMENTED STATOR WITH IMPROVED HANDLING AND WINDING CHARACTERISTICS AND
CORRESPONDING METHOD**PRIORITY CLAIM**

This application claims the benefit of United States Provisional Patent Application Serial
5 No. 60/422,676 filed on October 31, 2002, which is hereby incorporated by reference in its
entirety.

BACKGROUND OF THE INVENTION

The present disclosure relates to stator assemblies for electromagnetic machines and,
more particularly, to segmented stator assemblies in which the stator is formed from a number of
10 discrete stator stacks or segments with each stator segment comprising a yoke portion, a tooth
portion and a coil winding wound about the tooth.

While the use of distinct and separately wound stator segments provides some benefits, it
potentially increases the complexity and costs of manufacturing operations. For example, in
many segmented stators the stator segments are wound individually and one or more
15 manufacturing steps are required to appropriately interconnect all the individual stator coils to
form the phase windings. In such conventional stator assemblies, because the distinct and
separately wound stator segments are not coupled together during the winding operation, some
retention structure is required to hold the stator segments together when they are formed into an
annular stator. The requirements for the coil interconnecting step, the materials and equipment
20 required for the same, and the need for a secondary retention mechanism often require a
significant capital investment in manufacturing equipment to manufacture such machines and
significant material cost adds to the component costs of machines made according to such
processes.

- 2 -

In an effort to overcome some of the limitations associated with stator assemblies having separately-wound stator segments as described above, approaches were developed wherein magnetically-interconnected stator segments were physically coupled to one another prior to the winding operation such that the coils could be formed in an interconnected manner. In known
5 conventional approaches, the stator segments were interconnected through the use of hinges, sometimes referred to as puzzle lock connections, or through the use of thin interconnecting bridges of magnetically permeable materials. Such interconnecting structure often requires relatively complex stator lamination constructions, which can increase the overall manufacturing costs for a machine utilizing such a design. Moreover, the manufacturing steps required to
10 couple the distinct stator segments together via the hinge or puzzle lock structure increases the cost and complexity of the manufacturing process.

One limitation of stator assemblies using interconnecting puzzle pieces or bridges is that the stator assembly is often fairly inflexible and access to the stator teeth during the winding operation is somewhat limited. These limitations can restrict the extent to which magnetic wires
15 can be placed in the stator to form the stator windings or, in other words, the "slot fill."

An alternate conventional approach for forming a "segmented stator like" machine that does not require the use of hinges or puzzle locks relies upon the use of a stator assembly formed from groupings of stator segments that are magnetically coupled together by a thin, interconnecting bridge. Such a design is disclosed, for example, in Japanese Patent B-30107085.
20 Through the use of such a bridge, it appears possible to have a grouping of three stator teeth that are coupled together magnetically by a bridge element but that are opened to some degree allowing greater access to the stator teeth and, thus, greater slot fill. One limitation of this approach is that the stator assembly will typically require more than three stator teeth such that

- 3 -

construction of the complete stator assembly will require the use of multiple groupings of three stator segments, which necessitates multiple manufacturing steps of coupling the winding coils from the stator groupings together and structure for coupling the multiple stator groupings to form an annular stator. Such additional manufacturing steps and structure can significantly
5 increase the costs and manufacturing complexity associated with such stators.

The present disclosure describes several embodiments of a stator assembly that are designed to address the described and other limiting characteristics of conventional segmented stator assemblies.

SUMMARY OF THE INVENTION

10 In accordance with one exemplary embodiment constructed in accordance with certain teachings of the present disclosure, a stator assembly is provided that may be rounded into an annular form where the stator assembly comprises: a plurality of stator segments, each stator segment defining a yoke portion and a stator tooth, and a containment structure configured to position the stator segments relative to one another such that the stator segments do not
15 physically touch one another and such that no magnetic circuit between adjacent stator segments is formed.

In accordance with one exemplary process that may be performed in accordance with certain teachings of the present disclosure, a method for forming a segmented stator is disclosed where the method comprises the steps of: positioning a plurality of stator segments in a
20 containment structure such that no magnetic circuit between adjacent stator segments is formed; forming a winding coil about at least some of the stator segments; and deforming the containment structure to form an annular stator and to establish a magnetic circuit between adjacent stator segments.

- 4 -

Other aspects of the present disclosure will be apparent from a review of the disclosure, the figures and the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The description is presented with reference to the accompanying drawings in which:

5 Figures 1A-1D illustrate portions of an exemplary stator assembly constructed in accordance with certain teachings of this disclosure prior to the rounding of such a stator assembly into an annular form.

Figure 2 generally illustrates an exemplary stator assembly constructed in accordance with certain teachings of this disclosure after it has been rounded into an annular form.

10 Figure 3A and 3B generally illustrate certain aspects of a hinge assembly that may be used in connection with the exemplary embodiment of Figures 1A-1C and 2.

Figure 4 generally illustrates aspects of a stator assembly formed in accordance with certain teachings of this disclosure and a process for winding such a stator assembly.

15 Figures 5A-5C generally illustrate an alternate embodiment of a stator assembly that may be used in connection with the exemplary winding process described in connection with Figure 4.

Figure 6 generally illustrates an alternate embodiment of a hinge structure that may be used in connection with a stator assembly as described herein.

20 Figure 7A and 7B generally illustrate alternate engagement/locking structures that may be used with a stator constructed in accordance with certain teachings herein to retain the stator assembly in an annular form.

DESCRIPTION OF EMBODIMENTS

Turning to the drawings, and in particular to Figures 1A-1D, an exemplary embodiment of an improved segmented stator assembly 10 constructed in accordance with certain teachings of this disclosure illustrated

5 Referring to Figures 1A-1C, the stator assembly 10 includes a plurality of discrete, non-interconnected stator segments 20 sandwiched between two containment structures 30 and 40. In general, the stator segments 20 are formed from stacks of substantially identical laminations. The stator segments 20 are not directly interconnected or magnetically coupled to one another. The stator segments are positioned within and held in place by pockets in the containment
10 structures 30 and 40 that are designed and shaped to receive the stator segments. The containment structures define flexible hinges that couple the pockets that contain the stator segments 20 to one another. The containment structure is not magnetically conductive. During construction, the independent stator segments 20 are sandwiched between the containment structures 30 and 40. Then, while the stator segments are isolated from one another by the
15 containment structures 30 and 40, wire is wound about the teeth of the stator segments to form stator coils and phase windings. After winding, the stator assembly 10 is rounded into an annular form, bringing the stator segments into physical contact with one another and forming a closed magnetic circuit to form a completed stator. Details of this exemplary embodiment are provided below.

20 Stator assembly 10 includes twelve stator segments 20, although alternate embodiments with a different number of stator segments 20 are envisioned and possible. The construction of each stator segment 20 is similar to the construction of the stator segments used in conventional segmented stator assemblies. Each stator segment 20 is formed from a stack of substantially

- 6 -

identical laminations, typically stamped from steel. As best reflected in Figures 1B and 1C, each stack of laminations defines a main yoke portion 21 and an extending tooth portion 22 that terminates in a "T" shaped portion 23.

The yoke portion 21 of each stator stack defines an engagement projection 24 on one side
5 of the yoke 21, and an engagement notch 25 on the opposing side of the yoke 21. The engagement projection 24 and the engagement notch 25 are sized such that when adjacent stator segments 20 are brought together the engagement projection 24 will be received in the engagement notch 25. This inhibits relative movement of the adjacent stator segments 20 in at least one direction. Notably, unlike prior art configurations where interlocking puzzle pieces
10 serve to physically connect adjacent stator pieces together, the engagement notches and projections of the exemplary embodiment do not perform that function. Absent some other retaining structure, the engagement notches and projections will not physically interconnect or hold together adjacent stator segment pieces.

In addition to defining engagement notches and projections as described above, the yoke
15 portions 21 of each stator segment also define a rear channel 26. Rear channel 26 sized to receive in a press-fit relationship a portion of the containment structures 30 and 40 to help couple the stator segments to the containment structures. This is described in more detail below.

The "T" shaped portion 23 of each stator stack 20 defines an outer section 27 that upon complete assembly will be exposed and define a rotor bore and an inner section 28. The inner
20 section 28 is configured to help position and retain a motor winding coil in a desired position with respect to the stator tooth as described in more detail below.

As described above, stator segments 20 are not physically coupled together by hinges, interlocking puzzle pieces or other features that are themselves part of the stator segments. To

- 7 -

the contrary, no direct, stator segment-to-stator segment coupling exists between the stator segments 12. The two containment structures 20 and 30 "sandwich" the stator segments to form a relatively flexible stator assembly that is relatively easy to construct and wind. The stator assembly is held together in a form analogous to a "rack-of-ribs" where, in an open arrangement
5 as illustrated in Figure 1A, the solid stator segment assemblies 20 do not make contact and are not coupled together but are attached by a flexible member. The flexible member is the hinges of containment structures 30 and 40.

Referring to Figure 1C, details of one the containment structures 30 and 40 are illustrated. In general, each of the containment structures 30 and 40 comprises a flexible plastic structure
10 that defines various recesses or "pockets" in which a stator segment 20 may be positioned and held. The pockets are held together by an integral flexible hinges. Slits and positioning features (not illustrated in Figures 1A-1D) are provided to ensure proper positioning of the winding coils. Upon final assembly, these positioning features will be placed about the stator poles.

The stator assembly is constructed so as to accommodate three phase windings with each
15 phase winding comprising winding coils wound about the teeth of four stator segments 20. To accommodate the end-terminals of the three phase windings, the upper containment structure 30 includes six terminal retention features 31a, 31b, 31c, and 32a, 32b, and 32c that can be used to position and maintain the end terminals of three phase windings A, B and C (not illustrated in the figures). Each of the terminal retention features comprises a slit formed in the containment
20 structure and a projecting post around which a portion of the terminal end of the phase winding may be wrapped to position the terminal end of the winding in a fixed location.

In addition to including the terminal retention fixtures, the pockets that form the containment structure 30 also define slits 33. These slits allow the wires that form the phase

- 8 -

windings to pass from the portion of the containment structure 30 that faces the interior of the rotor bore to the portion of the containment structure 30 that faces the exterior of the stator assembly. As described in more detail below, the slits 33 are positioned to ensure that the wires that form the winding coils are positioned in a defined relationship to the stator assembly and to
5 any exterior shell member into which the stator assembly 10 may be positioned.

Additional details of the pockets that form containment members 30 and 40 are depicted in Figures 1B and 1C, which illustrate corresponding portions of the upper containment structure 30 and the lower containment structure 40 for holding a single stator segment 20. Neither the hinges that would connect the illustrated portions of the containment structures 30 and 40 to
10 adjacent portions nor the adjacent portions themselves are depicted in Figures 1B and 1C.

Referring to Figures 1B and 1C it may be noted that the containment structure 30 defines a top portion 33 that, when placed over a stator segment 20, will generally rest on top of the stator segment 20. The containment structure 30 further defines downwardly extending portions 34 that extend downwardly from the top portion 33. The downwardly extending portions 34 are
15 shaped to slide over the extending portion 22 of the stator segment. There are two downwardly extending portions 34 for each pocket of the upper containment structure that will slide over and cover the opposing sides of the extending portion 22 of the stator segment. As depicted in Figure 1B1, the ends of the downwardly extending portions 34 define a notched area 35 having a height H and a thickness T where the portion 24 changes from a first thickness to a second thickness.

20 As further depicted in Figures 1B and 1C the lower containment structure 40 defines a bottom portion that will rest on the bottom of the stator segment. The pockets of the lower containment structure 40 further define upwardly extending portions 37 that extend upwardly along the extending position of the stator segment 20. As depicted in Figure 1B2 the upwardly

- 9 -

extending portions 37 define notched areas 38 that are sized to be received in the notch 35 defined by the downwardly extending portions of the upper containment structure 40.

The notched structures of the upper and lower containment structures engage one another in a manner generally reflected in Figure 1D such that there is no direct path through any opening from the exterior of the insulating surface to the metal forming the stator tooth. Specifically, as reflected in Figure 1B, the only path from the exterior of the insulator to the metal forming the stator tooth would be through the small opening 200, and up the interface between the notched surfaces 35 and 38 and across the small opening. This engagement of notched surfaces ensures that the winding coils are adequately insulated from the stator teeth.

The upper and lower containment structures 30 and 40 further define extending flanges at the end of the structures that fit near the T-shaped ends of the stator assemblies. The containment structures 30 and 40 further define upper and lower projections 39a and 39b that are configured to fit into the channels 26 formed in the stator segments in a press-fit relationship to help join the containment structures 30 and 40 onto the stator segments 20 and to prevent relative movement between the stator segments 20 and the upper and lower containment structures 30 and 40.

As Figures 1A-1C illustrate, when the containment structures 30 and 40 are placed over a group of stator segments 20 such that multiple stator segments are sandwiched between the containment structures 30 and 40, portions of the containment structures 30 and 40 will surround and encase the extending portions 22 of the stator segments 20. Additionally, containment structures 30 and 40 will provide an insulating barrier between the region interior of the T-shaped portion of the stator segments 20 and the T-shaped end of the stator segments and between the region interior of the T-shaped end of the stator segments and the portion of the yokes of the stator segments that will face inwardly towards the stator bore. When positioned

- 10 -

about the stator, the containment structures 30 and 40 thus insulate any winding coil wound about the stator teeth of the stator segments 20 from the metal forming the stator segments. As reflected best in Figure 1A, a portion 27 each stator tooth is not covered by any portion of the containment structures and such exposed section will extend into the interior rotor bore when the
5 stator assembly is rounded into an annular form.

Additional details of the upper and lower containment structures 30 and 40 are illustrated in Figure 3A and Figure 3B, which illustrate a top down view of a portion of an exemplary upper containment structure 30. As illustrated, the containment structure 30 defines, for each pocket, an end portion 300 that fits over the T-shaped end of the stator assembly 20. While not
10 illustrated in Figures 3A and 3B, a similarly shaped portion exists on the lower containment structure 40. The end portion 300 is ramped to define a surface that will tend to cause any winding coil wound about the stator teeth to be pressed into or retained within the slot that will exit between adjacent stator teeth.

Figures 3A and 3B further illustrate details of exemplary embodiments of hinge 42 that
15 connects the adjacent pockets of the upper containment member 30. Similar hinges are found on the lower containment member 40. As illustrated, the hinge 42 comprises a small region of thin plastic that couples adjacent pockets of the containment structures together. The hinge element 42 is a "living hinge" in that it is relatively freely bendable in both directions. Moreover, the point of the hinge at which the bending occurs is substantially at the outer periphery of the stator
20 assembly when the stator assembly is rounded into an annular form. Figure 3A illustrates a hinge 42 in a closed configuration and Figure 3B illustrates an exemplary hinge 42 in a generally open configuration. The pockets of Figure 3B are not pockets associated with the terminals of the phase windings and, as such, no terminal retention features are illustrated in the figure. The

- 11 -

slits 33 for allowing passage of the wire forming the winding coils from the interior of the stator assembly to the exterior of the stator assembly are illustrated in Figures 3A and 3B.

After the stator core segments 10 are positioned within the containment structures 30 and 40 to form a flexible strip assembly as depicted in Figure 1A, winding coils are wound about the stator teeth so as to form a plurality of phase windings. In the example of Figures 1A-1D, winding coils may be positioned to provide three phase windings, with each phase winding including four winding coils. Other constructions are possible with the phase winding including fewer or greater numbers of winding coils.

The phase windings are formed by the following process. First, beginning of one phase winding is inserted into a terminal retention feature. Then, a winding coil is formed about the appropriate stator tooth. The wire is run out towards the back of the containment structure 30 through a slot 33, through the back of the portion of the containment structure associated with the next two adjacent stator teeth, bringing the wire in towards the tooth of the third adjacent stator teeth through a slit 33 in the relevant portion of the containment structure. This process is repeated until all the winding coils for the phase winding are formed.

The winding procedure described above can be accomplished in a variety of ways. In accordance with one exemplary winding process, a needle winding process is used wherein the coils that form the phase winding may be wound individually. In an alternate process, the coils that form the phase windings are wound simultaneously with one needle being provided for each phase windings.

One of the benefits of the "living" hinge illustrated above is that the stator assembly 10, prior to being rounded into an annular form, can be fully opened to allow greater access to the slot area for winding, thus allowing a greater slot fill and allowing for enhanced precision

- 12 -

winding techniques. The ability of the described embodiment to be fully open as described above allows the stator assembly to be fly wound at speeds faster than those that exist for conventional stator winding techniques and potentially enables slot fills greater than previously available.

5 Figures 3A and 3B also illustrate yet another preferred embodiment of the present disclosure, where web 43 and shields 44 are added to create a clearance between the coils and the stator stack when rounded into annular form. Web 43 and shields 44 run the entire length of each segment and are preferably made of plastic. As shown in Figures 3A and 3B, web 43 is designed in a manner so as to provide the flexibility to perform the winding process described
10 hereinabove. Two shields 44 are provided on opposite sides of each containment structure to ensure that the winding coils are adequately insulated from each stator tooth.

Figure 4 generally illustrates a stator assembly 10 formed as described above in connection with Figures 1A-1D. In the illustrated stator assembly, there are to be three phase windings, A, B and C. In Figure 4, each tooth of the stator is identified with a label identifying
15 the phase winding to which it corresponds and the polarity of the winding to be placed about the stator tooth. As those of ordinary skill in the art will appreciate, by winding the winding coil about the stator tooth in a first direction one is able to achieve an electromagnet of a first polarity when the winding is energized in a first direction. By winding the coil in the opposite direction, when the winding coil is energized in the same direction, it is possible to establish an
20 electromagnet of opposing polarity. Thus, Figure 4 identifies each stator tooth as being associated with a phase winding A, B or C and a particular polarity + or -. The winding pattern of Figure 4 is exemplary only and other winding patterns can be used without departing from the teachings of this disclosure.

- 13 -

Referring to Figure 4 it may be noted that the winding operation is performed through the use of a tooling element 400 that engages features on the stator assembly 10 so as to move the stator assembly 10 during the winding operation. The tooling element 400 moves the stator assembly during operation such that, at various times, the stator assembly is positioned to expose differing stator teeth to enable easy and fast precision fly winding. For example, in Figure 4, the stator assembly is positioned such that a set of stator teeth A-, B- and C- are exposed. Needle or fly winding techniques may be used to wind one or more of the exposed stator teeth. In this manner the stator assembly may be rapidly and quickly wound.

Regardless of whether fly or needle winding techniques are employed, and regardless of whether the stator assembly is wound in a configuration as illustrated in Figure 1A or in the open configuration of Figure 4, the exemplary stator assembly disclosed herein is constructed such that the phase windings can be placed in the stator assembly with no more than three starts and three finishes. For example in a winding operation where each stator tooth is individually wound, a winding operation could begin with the stator assembly positioned such that a winding coil is positioned about a first stator tooth (labeled A+ 402 in Figure 4). The winding apparatus could then proceed to wind the next tooth corresponding to the phase A winding (labeled A- 402 in Figure 4) without having to stop the winding process or cut the wire forming the phase winding. The process could continue until all of the teeth corresponding the phase winding were wound. After the phase A winding was completed, the next phase winding could be wound on the machine.

The winding approach and processes described above allowing for an "open" winding of the stator assembly 10 as depicted in Figure 4 can be beneficially applied to stator assemblies

- 14 -

having alternate constructions, such as stator assemblies where the stator segments are interconnected to one another directly by, for example, interlocking puzzle pieces.

Figures 5A-5C generally illustrate a stator assembly 500 that is formed from stator segments 501 where the stator segments 501 are directly coupled together by interlocking puzzle pieces. The construction of the stator segments 501 and the insulators 501 used with such segments is such that the stator assembly may be fully opened to allow complete access to the winding. Figures 5B1 and 5B2 generally illustrate a stator segment 501 of the type used in the embodiment of Figure 5A. The stator segment defines a yoke 502 and an extending tooth portion 503. The yoke 502 further defines a projecting element 504 and a receptive element 505, where the projecting element 504 is sized to fit into the receptive element 505 of a neighboring stator segment to create a chain-like stator assembly. The projecting element 504 defines upper and lower recesses and the receptive element defines upper and lower extensions. The upper and lower recesses are sized so as to receive the upper and lower extensions of an adjacent stator segment. This arrangement of interfering recesses and projections allows for the stator assembly to be opened for full and fast winding as described above.

Figures 5C1 and 5C2 generally illustrate the form of insulating elements that may be positioned about the stator segments of Figure 5B1 and 5B2 to produce the stator assembly of Figure 5A. In general, the insulating elements comprise plastic elements that fit over the individual stator segments to insulate the winding coil to be placed about the stator tooth from the metal that forms the stator tooth. Each insulating element has an upper component 510 and a lower component 512, where each of the upper and lower components defines a top (or bottom) section that forms an insulating barrier between the top and bottom of the stator tooth and the winding coil and a downward (or upward) extension 514, 516 that serves to insulate the winding

- 15 -

coil from the portion of the yoke that faces the interior bore of the stator. Other insulating materials (not illustrated) may be used to provide insulation between the sides of the stator tooth and the winding coil. Referring to Figures 5C1 and 5C1, it may be noted that the insulating elements may further define a projecting finger 518, 519. The projecting fingers 518, 519 may
5 help keep the interlocking puzzle pieces from moving in an axial direction when the stator segments are coupled together, and thus tend to maintain the engagement of adjacent stator segments. Because the stator assembly 500 of Figures 5A-5C can be fully opened, it would be wound in accordance with the "open" winding processes described above in connection with Figure 4.

10 It should be noted that the use of the containment structures 30 and 40 or the special interlocking puzzle elements of Figures 5A-5C allows for the construction of a stator assembly where a flexible chain or strip can be formed that contains all of the stator teeth that will be used to form the stator. Moreover, because the hinge 42 of the embodiment described in connection with Figures 1A-1D and the chain connection as depicted in Figures 5A-5D can be repeatedly
15 opened and closed, it is possible to wind the described stator assemblies in a variety of ways and using a variety of processes where the number of starts and the number of finishes used in the winding operation is not greater than the number of phase windings. For example, in the winding operation described above in connection with Figure 4 there are three start operations and three stop operations.

20 While the living hinge 42 of Figures 3A and 3B allows for a winding operation where the tooth to be wound is fully exposed, under certain circumstances it is desirable to have a stator assembly that, prior to winding, is not as flexible as that previously described. It may also be desirable that the hinge element is stiff such that the stator assembly is relatively inflexible

- 16 -

during the winding operation. Such a stator assembly can be achieved in a number of ways. For example, the hinge element may be constructed of relatively thick plastic material such that flexing of the hinge during winding is inhibited. Alternatively, the containment structures 30 and 40, and therefore the hinge element may be formed from a relatively stiff material such that flexing is precluded. Alternatively, the rounding of the stator assembly into annular form may involve breaking the containment structure at the hinge element. Still other embodiments are envisioned where the hinge is essentially as described above in connection with Figures 3A and 3B, but where some additional stiffening support is provided to inhibit flexing of the stator assembly during the winding operation. Such an embodiment is generally illustrated in Figure 6.

Referring to Figure 6, two adjacent pockets from a containment structure are illustrated. The pockets have the same general structure as described above in connection with Figures 3A-3B, except for the inclusion of two retaining features 600 and 601 that may take the form of upwardly extending pins and two receptive elements 602 and 603 that may take the form of a small holes or openings in the pockets. In the illustrated embodiment a stiffening member 604, that may take the form of a bent wire, a shaped resilient plastic piece, or other flexible, yet stiff form, is provided that engages the retaining members and receptive elements and provides some stiffening of the hinge element 42. When the stator assembly is in the open, non-annular configuration, the stiffening member will tend to prevent movement or flexing of the stator assembly as the strength of the stiffening member will be selected so as to overcome the bending forces that would typically be applied to the hinge element 42 during a winding operation. The stiffening member, however, would be selected to have a strength that is not sufficient to overcome the forces that would be applied to the stator assembly during the operation where the stator assembly is rounded into an annular form. During that operation, the stiffening would

- 17 -

break, or preferably bend to avoid the creation of any potentially contaminating particles, to allow the stator assembly to be rounded in an annular form. In this embodiment, the stator assembly would be relatively stiff during its winding operation, such that the winding operation would proceed generally as described above (e.g., a winding operation where each phase
5 winding is wound on the machine and where the number of stars and stops is equal to and/or no greater than the number of phase windings).

Once the stator assembly 10 as described above is completely wound, whether through an open winding operation as described in connection with Figure 4, a winding operation with a stiffened stator assembly, or another winding method, the stator assembly will be rounded into an
10 annular form for use as a stator element. When the stator assembly is so rounded, the edges of adjacent stator segments will come into physical contact with one another, thus producing a closed magnetic circuit.

There are several approaches that may be used to maintain the rounded stator assembly in its annular form. In one embodiment, the rounded assembly is simply inserted into a motor
15 housing or shell in a press fit relationship such that the housing or shell serves to maintain the stator assembly in its annular form. In an alternate embodiment, some form of band or other external retaining structure may be used to circle or otherwise engage the annularized stator assembly so as to hold the stator assembly in the desired configuration. Still further embodiments are envisioned wherein one or more of the containment structures is provided with
20 engagement or locking elements so that opposing ends of the stator assembly can engage and, thus maintain the stator assembly in an annular form.

Figures 7A and 7B generally illustrate two alternate engagement/locking structures that may be provided on the containment structures to hold the stator assembly in an annular form. In

- 18 -

the embodiment of Figure 7A one of the pockets on one end of the stator assembly is provided with a projection 700 having a generally sloped front surface and a relatively flat back surface. The pocket on the opposing end defines a receptive element 702 having a latching finger. When the stator assembly is annularized and the projecting element is moved into engagement with the
5 receptive element, the latching finger will lock down on the flat back of the extension 700 and tend to hold the stator in an annularized form. Figure 7B illustrates an alternate configuration where a ball-and-socket form of engagement is provided.

It should be noted that the interlocking/engagement elements as exemplified in Figure 7A and 7B need not have a strength sufficient to hold the stator assembly in an annular form for all
10 purposes. Such engagement elements may be used to hold the assembly together for interim manufacturing or testing operations while a motor housing, shell or other form of retention could be used a supplementary or alternate retaining structure effort in the final product.

One attribute that may be implemented in connection with the stator assemblies described herein is to route the wires used to form the winding coils in such a manner that they do not pass
15 over or even near the hinge portions 42 of the containment structures 30 and 40, which bend when the stator assembly 10 is rounded to form an annular stator. In such an embodiment, features on the containment structure may be provided to actively preclude and prevent the wires forming the winding coils from passing over or in the vicinity of the hinges 42. Such features may help ensure that any motor constructed in accordance with certain teachings of this
20 disclosure meets any applicable requirements that electrical conductors be at least an inch inward of the outer diameter of the stator assembly. These features further tend to ensure that the wires forming the phase winding do not interfere with pressing tools necessary to press the stator

- 19 -

assembly into a secondary retentive device (e.g., a stator shell) used to hold the stator assembly together.

In the embodiment described above, the features on the containment structures will generally ensure that the wires that form the phase winding pass inwardly (i.e. on the rotor bore
5 side) of the portion of the hinge element 42 where the bend occurs. Because the path of the winding wire is inward of the hinge 42, there will necessarily be minor flexure of the windings when the bending operation is performed. The features of the containment structures may be formed such that any flexure of the wire will be directed upward, downward or inward, but not outward towards hinge 42

10 While the apparatus and methods of this invention have been described in terms of preferred embodiments, it will be apparent to those skilled in the art that variations may be applied to the apparatus and process described herein without departing from the concept and scope of the invention. For example, in the embodiment illustrated in Figures 1B and 1C, portions 34 and 37 of the containment structure serve to insulate the side edges of the stator teeth
15 from the coils that are wound about such teeth. While such an embodiment is appropriate for many applications, in applications where the stack height of the motor is not consistent, such an embodiment may not be ideal as different containment structures would be required to provide the appropriate insulation for different stack heights. Thus one alternate embodiment would be to eliminate such portions of the containment structures and use different insulating materials
20 (e.g., insulating strips) such that the same containment structures could be used for motors of different stack heights. Still further, alternate embodiments are envisioned wherein the containment structures are formed from a highly thermally conductive material or are filled with thermally conductive resin or other thermally conductive materials so as to aid in the removal of heat from the stator assembly during operation of the motor. Such modifications, as well as
25 other substitutes and modifications are deemed to be within the scope and concept of the invention.

- 20 -

CLAIMS:

1. A stator assembly, comprising:

a plurality of stator segments, each stator segment defining a yoke portion and a stator tooth;

5 a plurality of containment structures configured to receive the plurality of stator segments and position the stator segments relative to one another such that adjacent stator segments do not physically touch one another.

2. The stator assembly of claim 1, wherein the containment structure is configured such that no magnetic circuit between adjacent stator segments is formed.

10 3. The stator assembly of claim 1, wherein the stator assembly may be rounded into an annular form.

4. The stator assembly of claim 3, wherein adjacent stator segments are in physical contact when the stator assembly is in annular form.

15 5. The stator assembly of claim 1, wherein each stator segment is sandwiched between an upper containment structure and a lower containment structure.

6. The stator assembly of claim 5, wherein each containment structure comprises a notched surface designed to engage the notched the surface of the other containment structure, wherein the engaged notched surfaces ensure that winding coils are adequately insulated from the stator tooth.

20 7. The stator assembly of claim 1, wherein the yoke portion of each stator segment comprises a rear channel for coupling the plurality of stator segments to the plurality of containment structures.

- 21 -

8. The stator assembly of claim 1, wherein adjacent containment structures define a flexible hinge for positioning the stator segments relative to one another.
9. The stator assembly of claim 8, wherein the flexible hinge is at least partially bendable in both directions.
- 5 10. The stator assembly of claim 1, wherein the plurality of containment structures comprises positioning features for effecting desired positioning of winding coils.
11. The stator assembly of claim 10, wherein the positioning features include slits and projecting posts.
12. The stator assembly of claim 1, wherein adjacent containment structures define a flexible
10 web for providing a clearance between the winding coils and each stator segment.
13. The stator assembly of claim 1, wherein each containment structure further comprises at least one shield for providing a clearance between the winding coils and each stator segment.
14. The stator assembly of claim 1, wherein each stator segment comprises at least one
15 engagement notch and at least one engagement projection designed to inhibit relative movement of adjacent stator segments.
15. The stator assembly of claim 14, wherein the at least one engagement notch and at least one engagement projection do not physically interconnect adjacent stator segments.
16. A stator assembly that may be rounded into an annular form, comprising:
20 a plurality of stator segments, each stator segment defining a yoke portion and a stator tooth;

- 22 -

means for positioning the stator segments relative to one another such that adjacent stator segments do not physically touch one another and such that no magnetic circuit between adjacent stator segments is formed.

17. A method for forming an annular stator assembly, the method comprising the steps of:

5 positioning a plurality of stator segments such that no magnetic circuit between adjacent stator segments is formed;

forming at least one winding coil about at least some of the stator segments; and

deforming the plurality of stator segments to form an annular stator assembly and to establish a magnetic circuit between adjacent stator segments.

10 18. The method of claim 17, wherein the forming step comprises three phase windings.

19. The method of claim 17, wherein a plurality of containment structures is used in the positioning step to receive the plurality of stator segments and to position the stator segments relative to one another such that adjacent stator segments do not physically touch one another.

15 20. The method of claim 19, wherein adjacent containment structures define a flexible hinge for positioning the stator segments relative to one another.

21. The method of claim 20, wherein the flexible hinge is at least partially bendable in both directions.

20 22. The method of claim 20, wherein the forming step is performed with at least a portion of the plurality of stator segments positioned in at least a partially opened configuration, wherein the at least partially opened configuration provides greater access to the slot formed by the teeth of adjacent stator segments.

- 23 -

23. The method of claim 17, wherein the forming step is performed with the plurality of stator segments positioned in a substantially linear configuration.

24. The method of claim 23, wherein stiffening means is utilized to maintain the substantially linear configuration.

5 25. The method of claim 24, wherein the deforming step is performed without removing the stiffening means.

26. The method of claim 17, wherein at least one winding coil is formed by a needle winding process.

10 27. The method of claim 17, wherein at least one winding coil is formed by a fly winding process.

28. The method of claim 17, wherein a plurality of winding coils are formed simultaneously.

29. The method of claim 17, wherein the number of starts and the number of finishes used for each winding coil is equal to the number of winding coils.

15 30. The method of claim 17, further comprising latching means for securing the annular stator assembly.

31. A method for forming an annular stator assembly, the method comprising the steps of:
coupling a plurality of stator segments, each stator segment defining a yoke portion and a stator tooth;

opening at least a portion of the plurality of stator segments positioned in at least a
20 partially opened configuration, wherein the at least partially opened configuration provides greater access to the slot formed by the teeth of adjacent stator segments.

forming at least one winding coil about at least some of the stator segments; and
deforming the plurality of stator segments to form an annular stator assembly.

- 24 -

32. The method of claim 31, wherein each stator segment comprises a yoke portion and a stator tooth, the yoke portion having a projecting element and a receptive element, the projecting element sized to fit into the receptive element of an adjacent stator segment to create a flexible joint.
- 5 33. The method of claim 31, wherein at least one winding coil is formed by a needle winding process.
34. The method of claim 31, wherein at least one winding coil is formed by a fly winding process.
35. The method of claim 31, wherein more than one winding coil is formed at one time.
- 10 36. The method of claim 31, wherein the number of starts and the number of finishes used for each winding coil is equal to the number of winding coils.
37. The method of claim 31, further comprising latching means for securing the annular stator assembly.

1/9

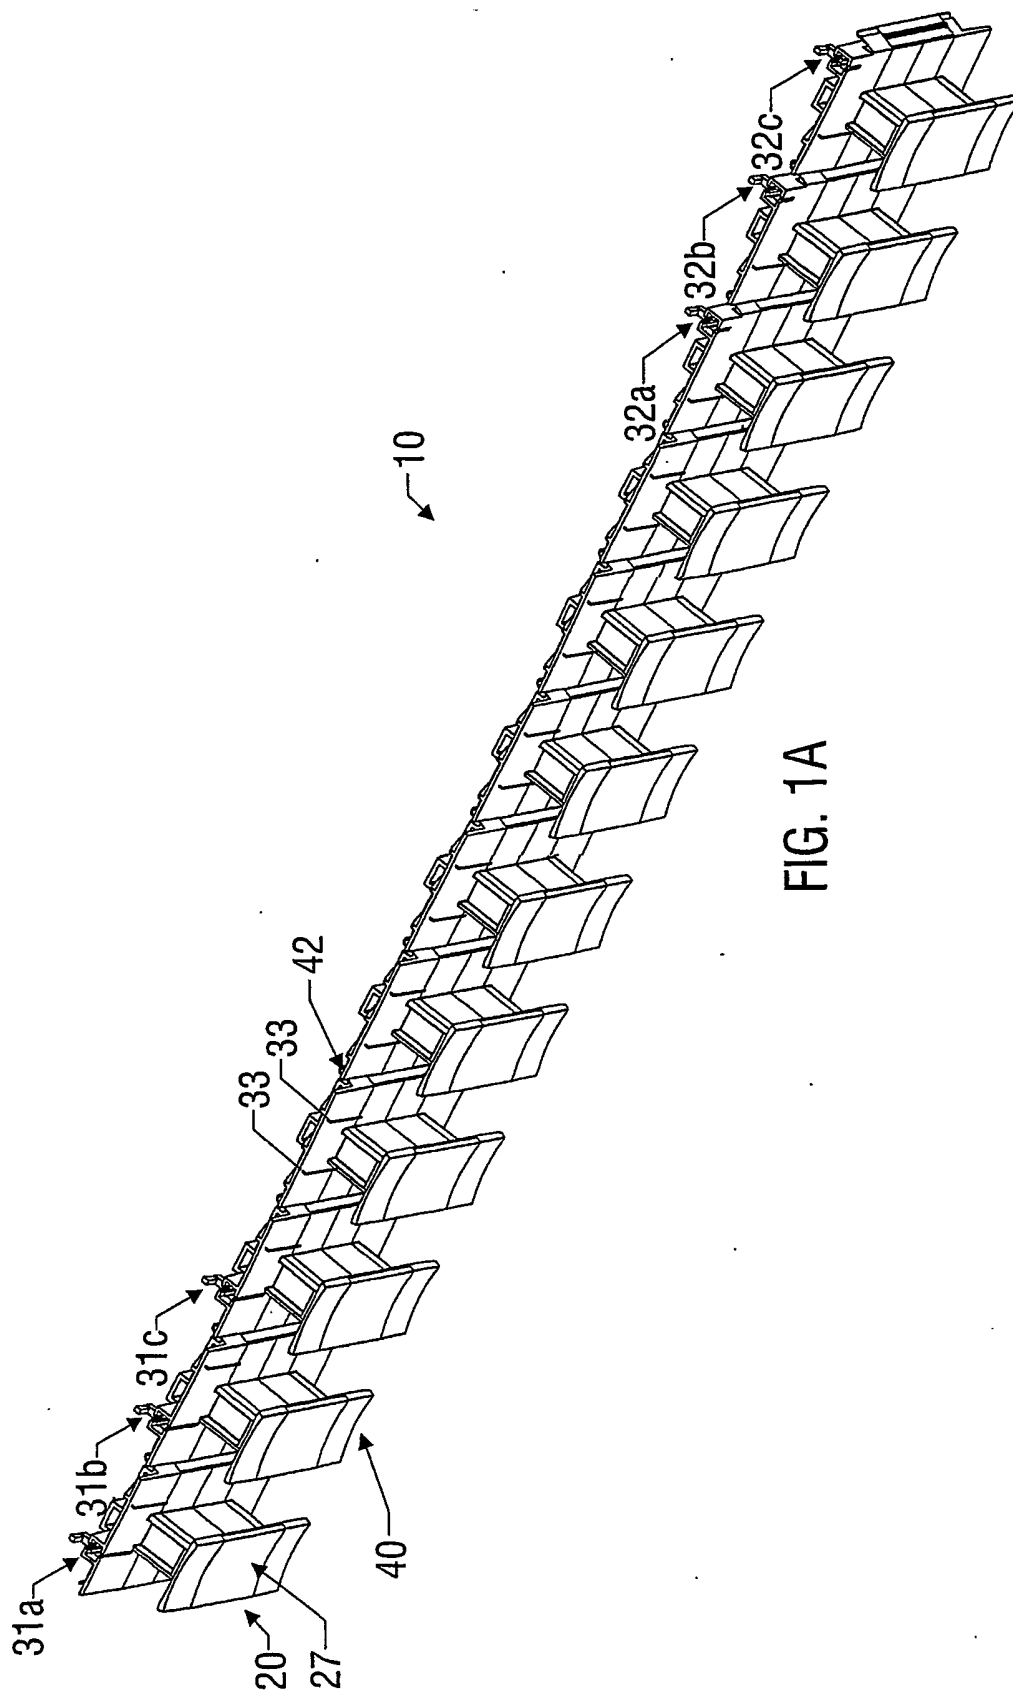


FIG. 1A

BEST AVAILABLE COPY

2/9

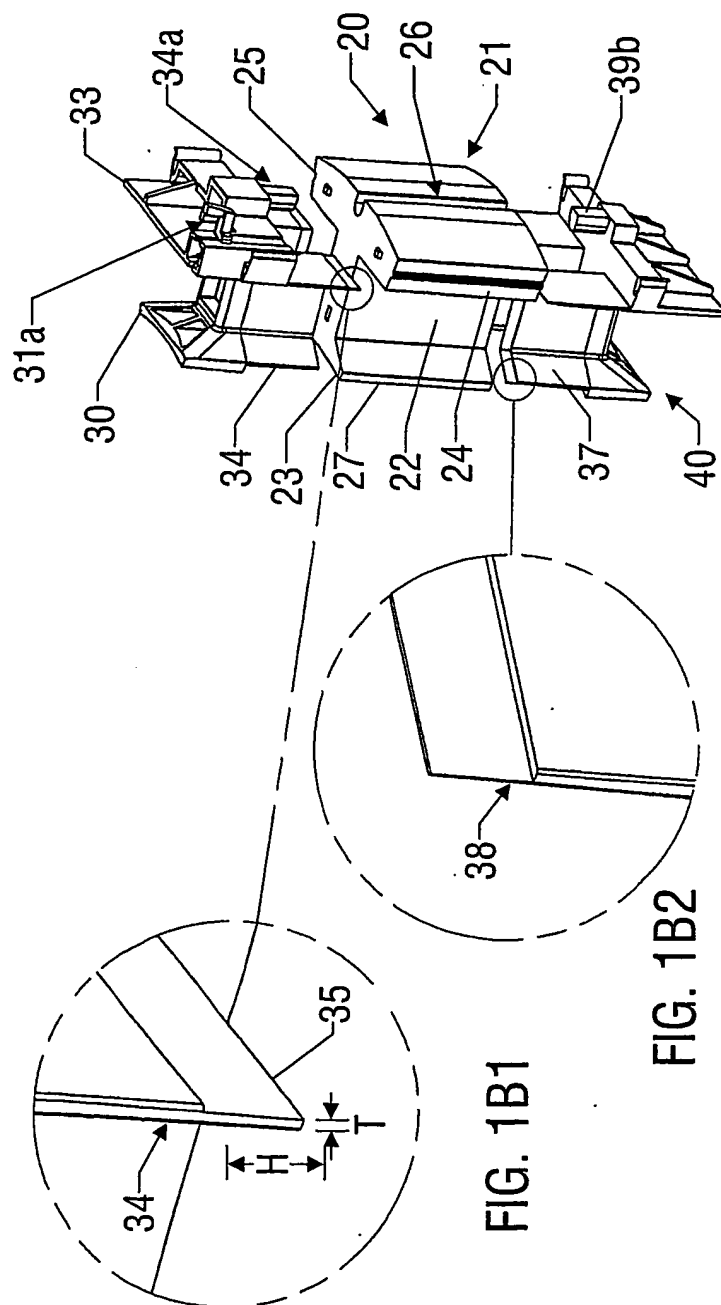


FIG. 1B

FIG. 1B1

FIG. 1B2

3/9

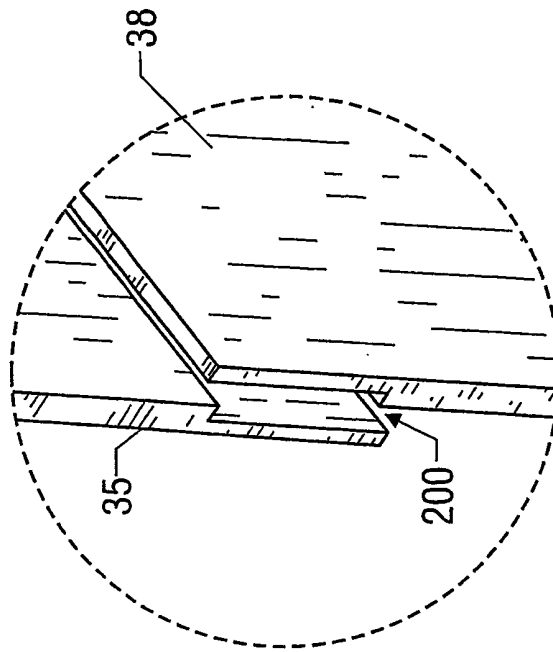


FIG. 1D

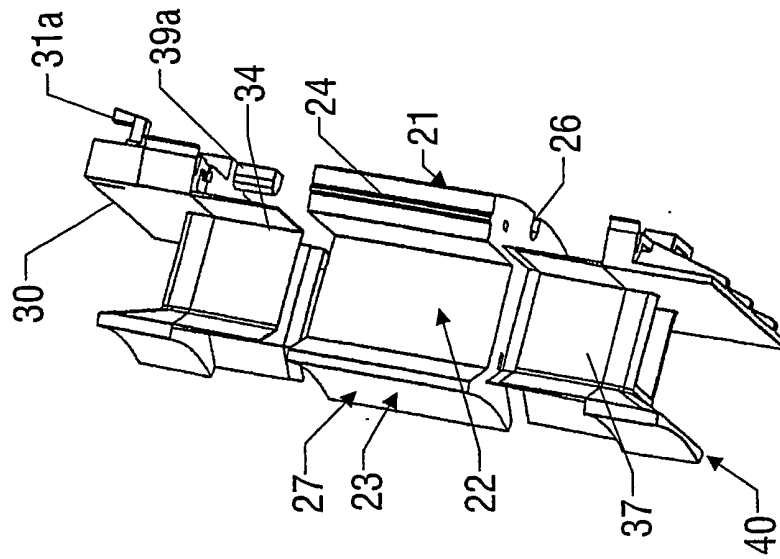


FIG. 1C

4/9

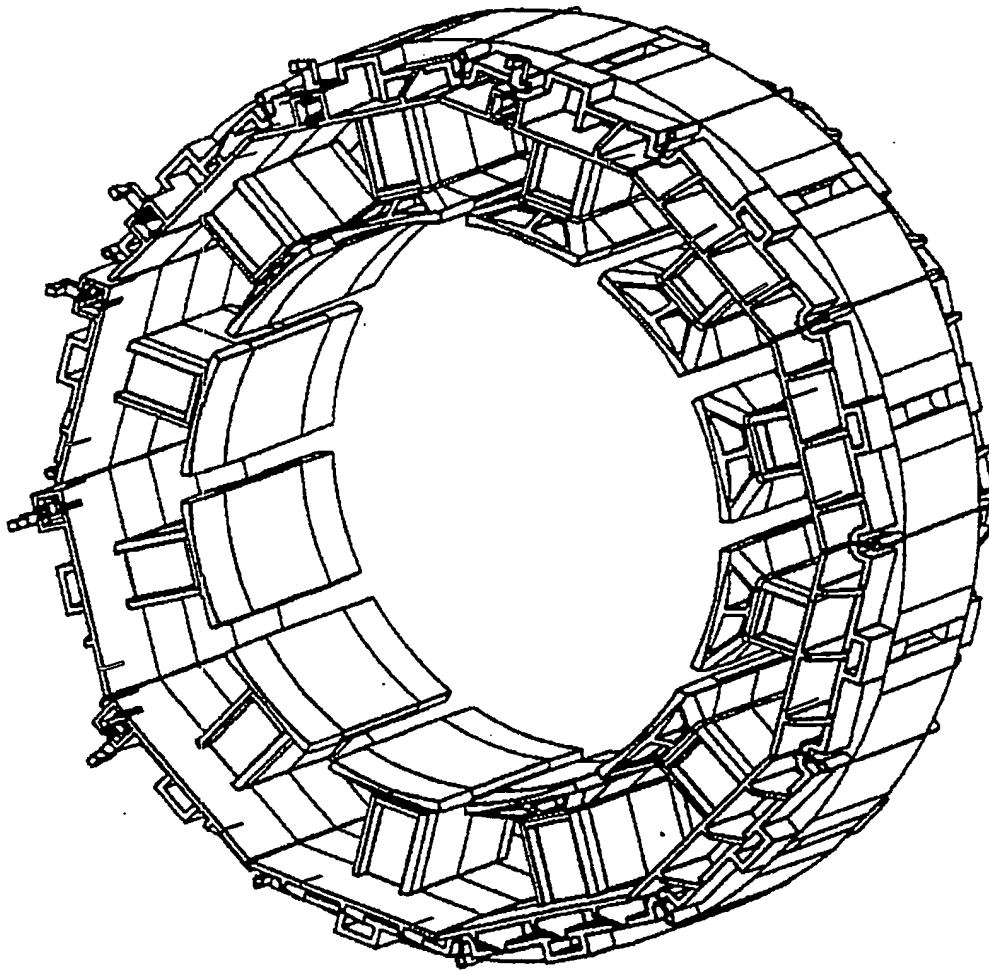


FIG. 2

BEST AVAILABLE COPY

5/9

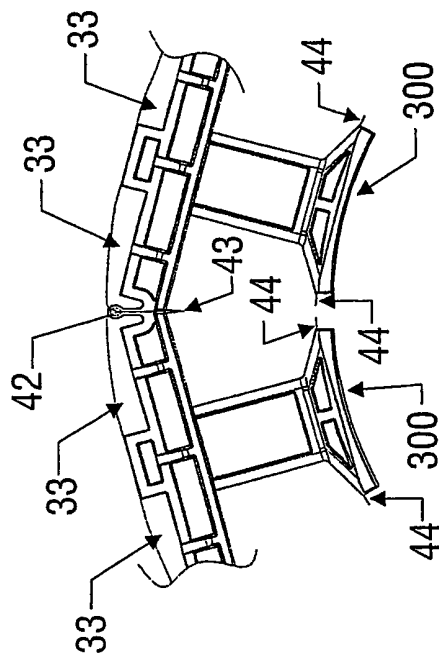


FIG. 3A

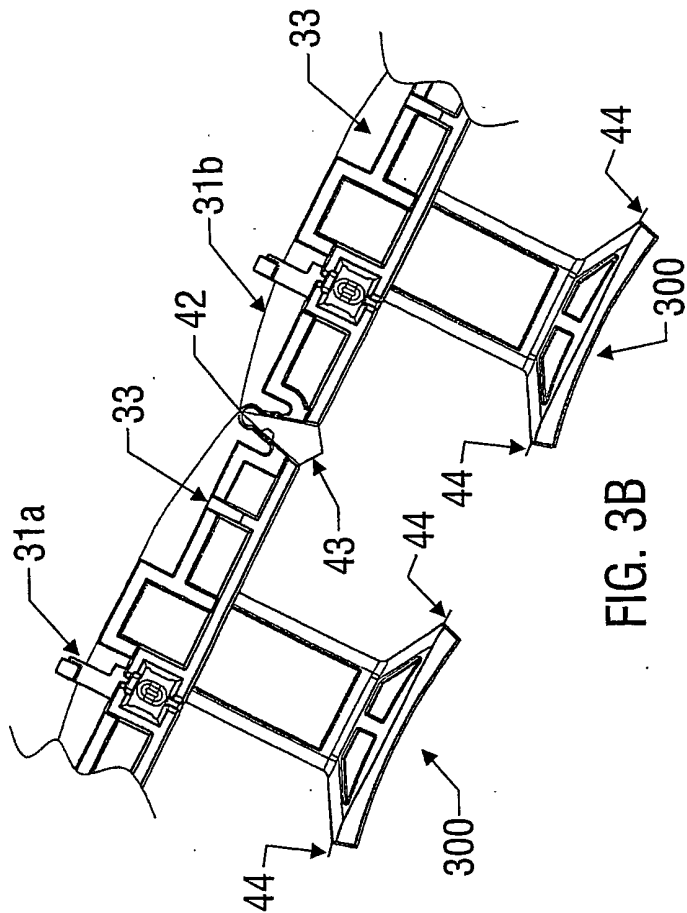


FIG. 3B

BEST AVAILABLE COPY

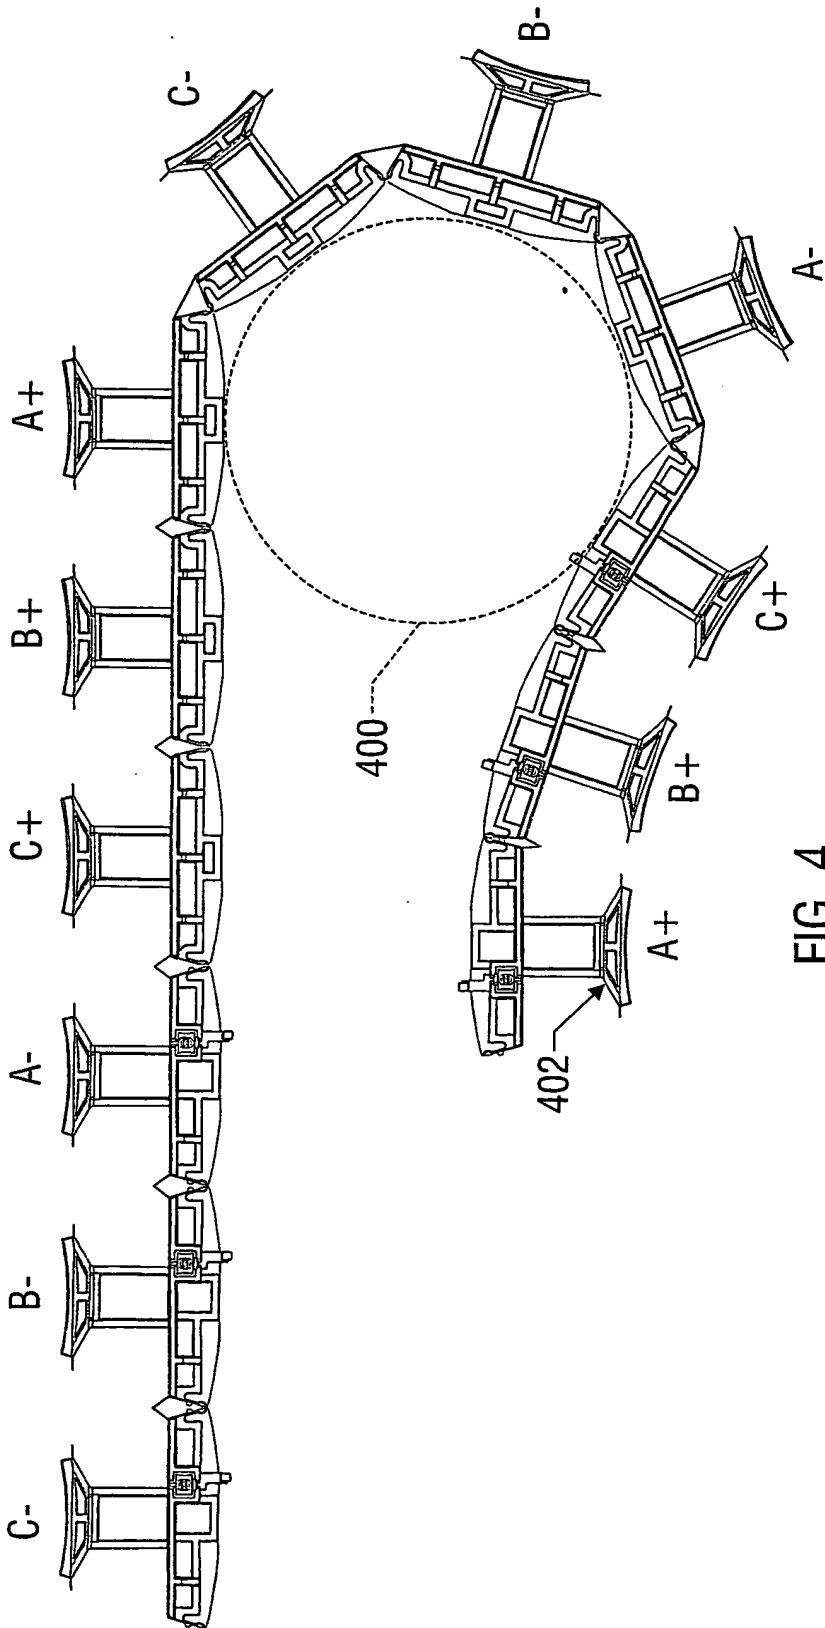


FIG. 4

BEST AVAILABLE COPY

7/9

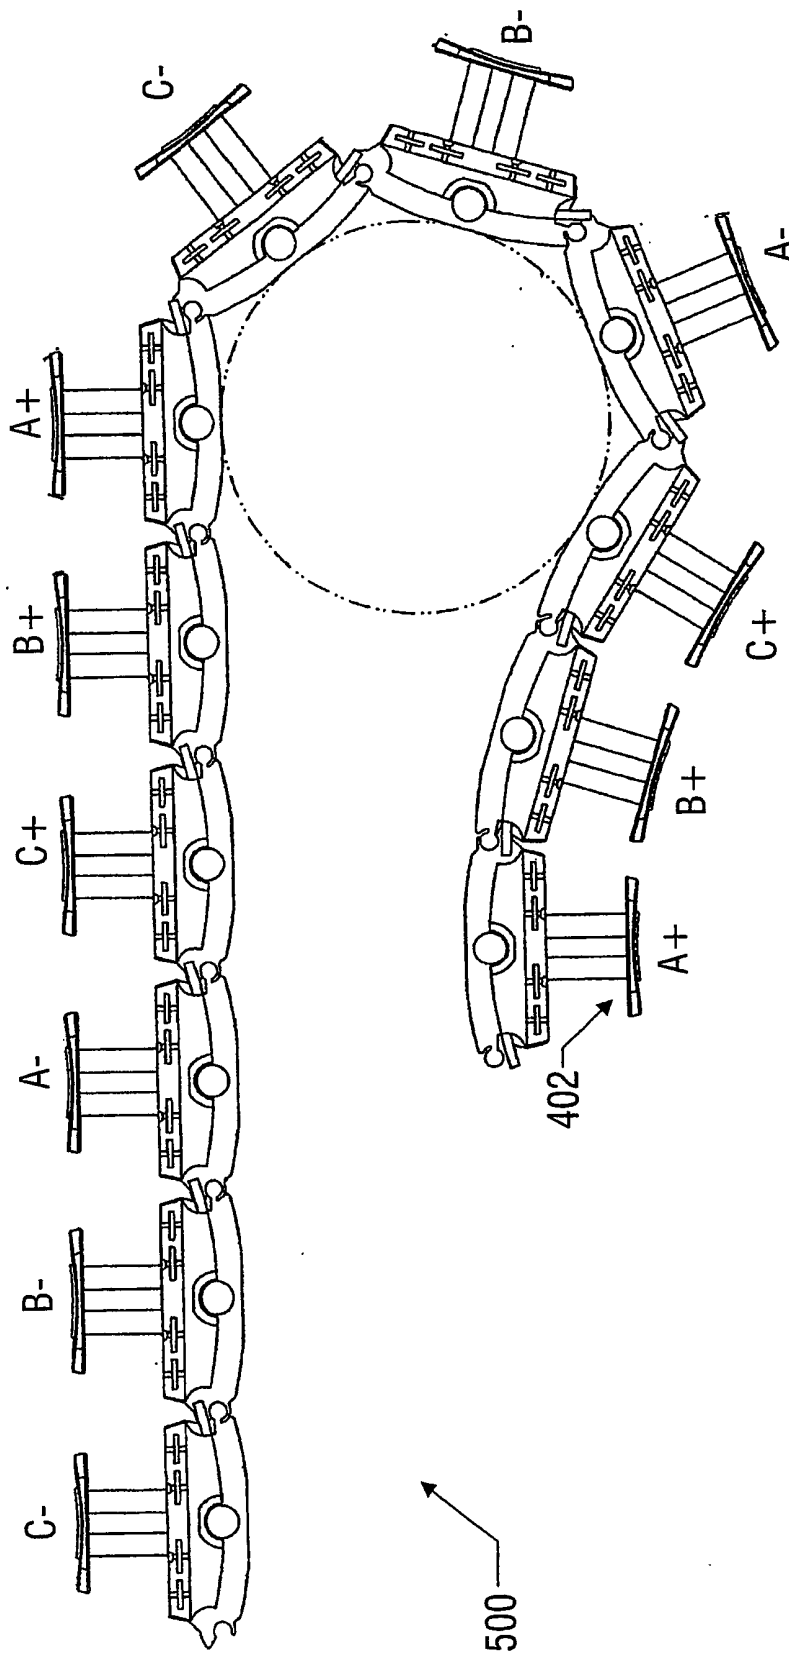


FIG. 5A

BEST AVAILABLE COPY

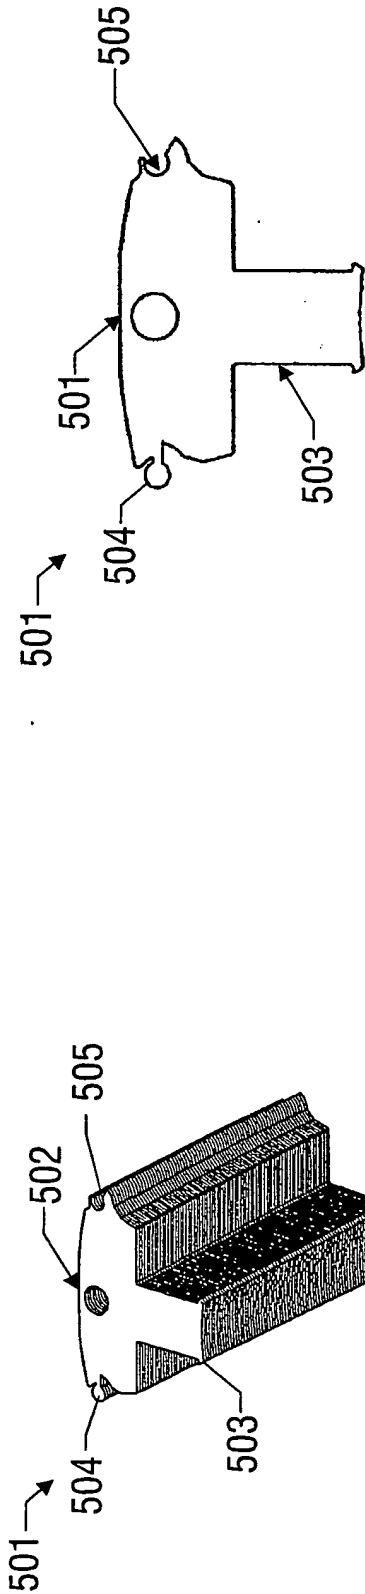


FIG. 5B1

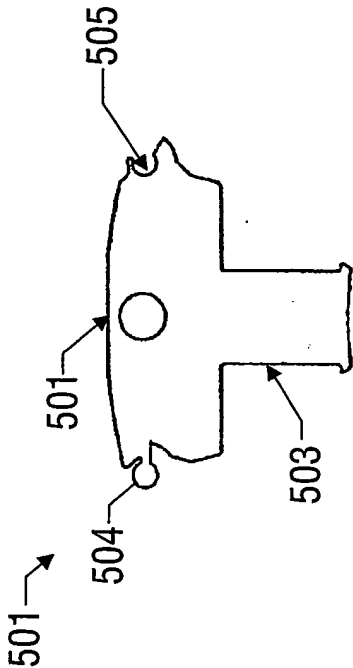


FIG. 5B2

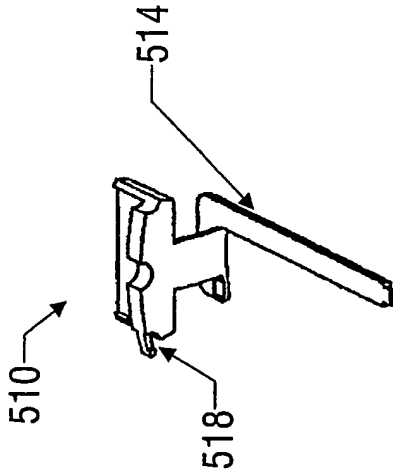


FIG. 5C1

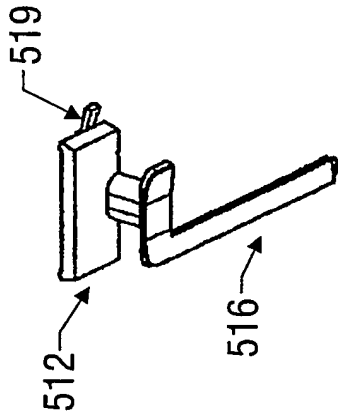


FIG. 5C2

BEST AVAILABLE COPY

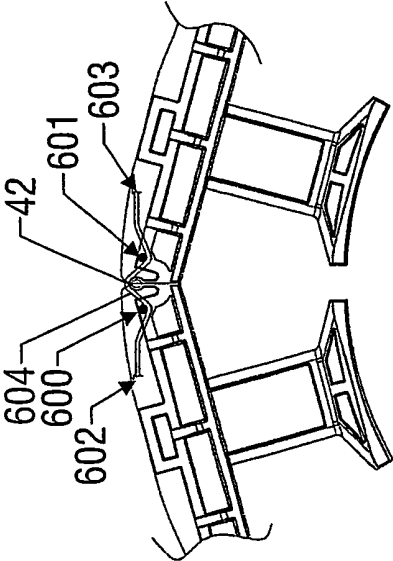


FIG. 6

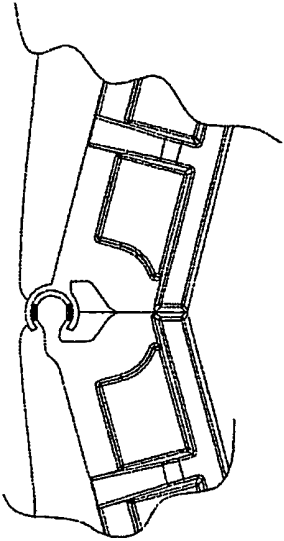


FIG. 7B

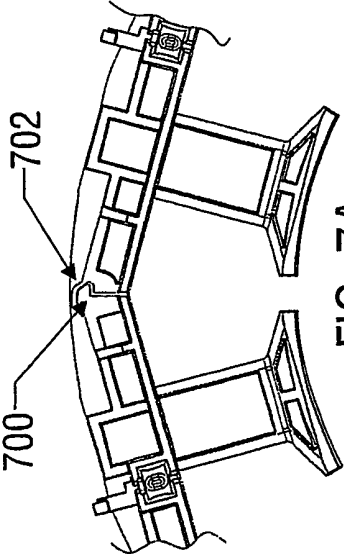


FIG. 7A

BEST AVAILABLE COPY

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/32557

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H02K3/52 H02K15/095 H02K1/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H02K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 03, 30 March 2000 (2000-03-30) -& JP 11 341717 A (MATSUSHITA SEIKO CO LTD), 10 December 1999 (1999-12-10)	1-4, 7, 10, 11, 17-19, 23, 27, 29-31, 34, 36, 37
Y	abstract; figures 6-8, 10, 11, 14-17, 19-28	1-3, 5, 6, 8-11, 16-24, 29
Y	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 08, 30 June 1999 (1999-06-30) -& JP 11 089128 A (TOSHIBA CORP), 30 March 1999 (1999-03-30) abstract; figures 2-8, 10, 11	1-3, 5, 6, 8-11, 16-24, 29

-/--

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

18 February 2004

Date of mailing of the international search report

27/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

von Rauch, E

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/32557

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02/47240 A (SEKI YASUTAKE ; UEDA TAKEMI (JP); ISHIDA YASUHIRO (JP); MORITA KAZUNOR) 13 June 2002 (2002-06-13) abstract; figures 1,2,4-7,9	1-4, 10-19, 23,26, 28,29, 31,33, 35,36
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 16, 8 May 2001 (2001-05-08) & JP 2001 025185 A (TOSHIBA CORP), 26 January 2001 (2001-01-26) abstract	1,3,16, 17
P,X	PATENT ABSTRACTS OF JAPAN vol. 2002, no. 12, 12 December 2002 (2002-12-12) -& JP 2002 218716 A (TOSHIBA INDUSTRIAL PRODUCTS MANUFACTURING CORP), 2 August 2002 (2002-08-02) abstract; figures 1,2,4-7,9-11	1-4,7,8, 16,17, 19,20, 22-24, 30,31,37
P,X	PATENT ABSTRACTS OF JAPAN vol. 2003, no. 02, 5 February 2003 (2003-02-05) -& JP 2002 305848 A (SANYO DENKI CO LTD), 18 October 2002 (2002-10-18) abstract; figures 1-7	1-4, 14-19, 23,26, 27,30, 31,33, 34,36,37

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/32557

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 11341717	A	10-12-1999	NONE	
JP 11089128	A	30-03-1999	NONE	
WO 0247240	A	13-06-2002	JP 2002176753 A AU 2410402 A WO 0247240 A1	21-06-2002 18-06-2002 13-06-2002
JP 2001025185	A	26-01-2001	NONE	
JP 2002218716	A	02-08-2002	NONE	
JP 2002305848	A	18-10-2002	NONE	

Form PCT/ISA/210 (patent family annex) (July 1992)

THIS PAGE BLANK (USPTO)